

INSTRUCCIONES DE SEGURIDAD

No requiere mantenimiento funcional.
Para su limpieza no utilizar productos amoniacales, disolventes ni abrasivos, etc.
Todas las magnitudes y características se entienden a título informativo.
Santa&Cole se reserva la facultad de modificar, suprimir o ampliar nuestros productos sin previo aviso.
La garantía tiene un plazo de 2 años a partir de la fecha de compra.
Cobertura de los siguientes supuestos:
- Reparación gratuita de vicios o defectos originarios.
No cobertura de los siguientes supuestos:
- Deficiencias ocasionadas por negligencia, golpes, uso indebido, etc.
- Materiales sometidos a su desgaste en su uso normal.


SAFETY INSTRUCTIONS

No functional maintenance is required.
For cleaning do not use ammonia, solvents or abrasives.
All magnitudes and characteristics are considered for information.
Santa&Cole reserves the right to modify, delete or expand our products without notice.
Warranty covers a period of 2 years from the date of purchase.
Coverage of the following assumptions:
- Free repair defects or manufacturing defects.
No coverage of the following assumptions:
- Shortcomings caused by neglect, beatings, abuse.
- Materials subjected to wear in normal use.

Fecha de actualización / Update: 6/2013

BANCAL


Julià Espinàs y Olga Tarrasó, 2012

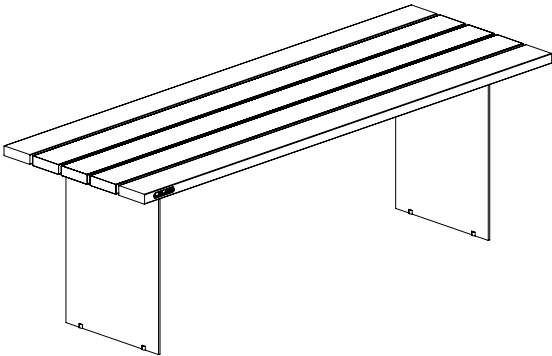


INSTRUCCIONES DE MONTAJE
ASSEMBLY INSTRUCTIONS

santacole.com





MESA BANCAL / BANCAL TABLE		
Peso / Weight	Altura / Height	Sección / Section
90 Kg	74 cm	220x74x76 cm
MESA / TABLE TOP		
Material / Material	Acabado / Finish	
Madera tropical FCS/ Tropical wood FSC	Acetite dos componentes / Oil in two components	
PATAS / LEGS		
Material / Material	Acabado / Finish	
Acero/ Steel	Cataforesis + Pintura / Cataphoresis + Painting	

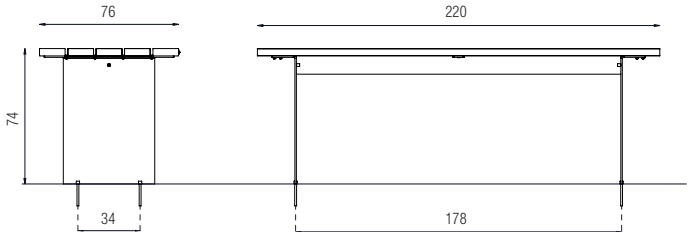

SUMINISTRO
SUPPLY LIST

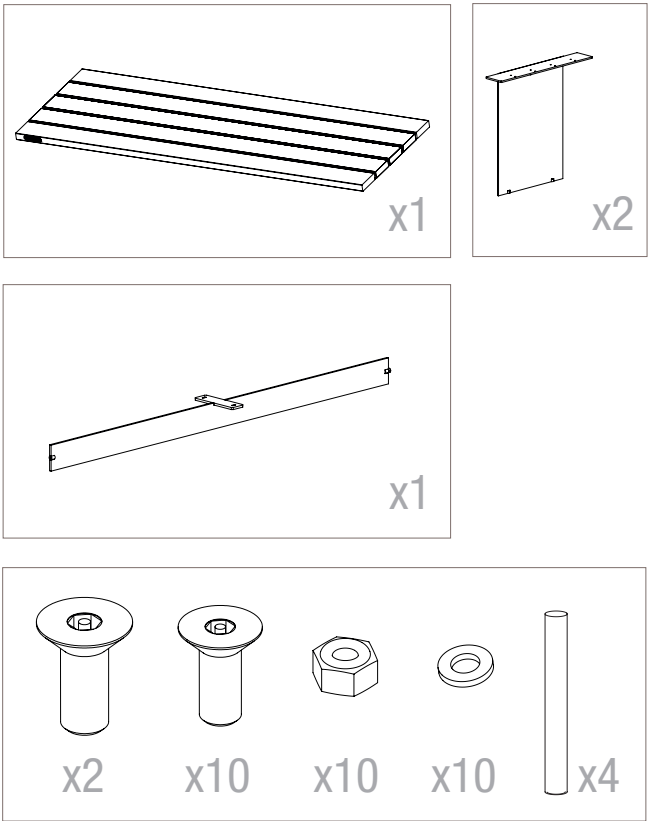

MONTAJE
ASSEMBLY

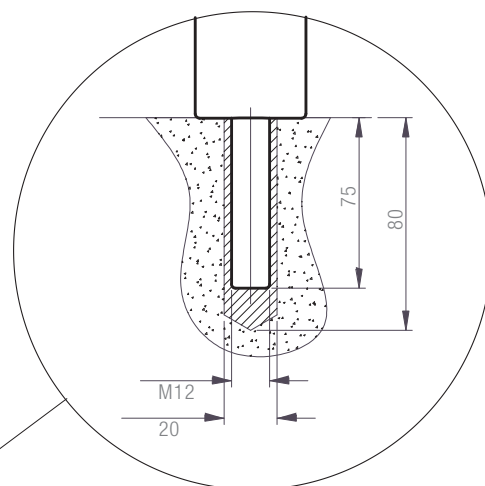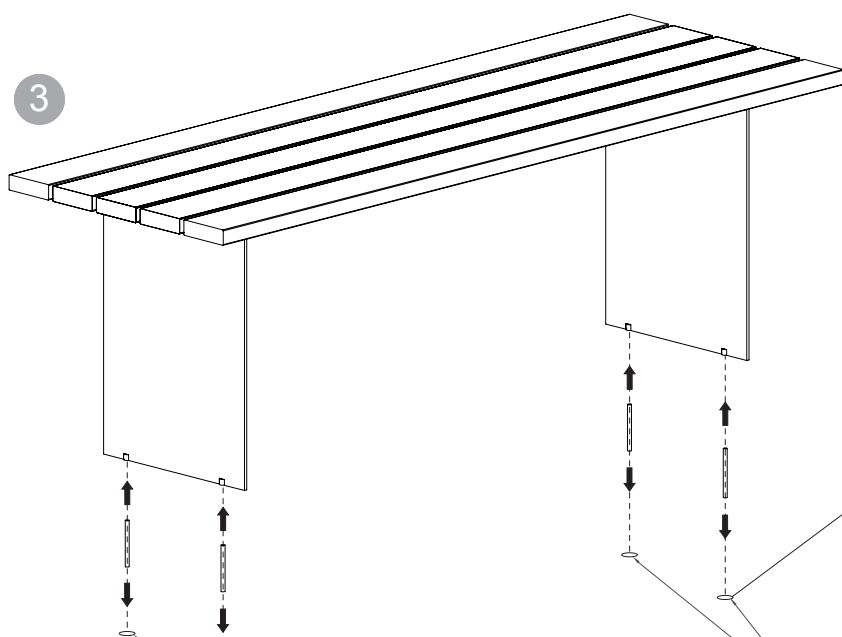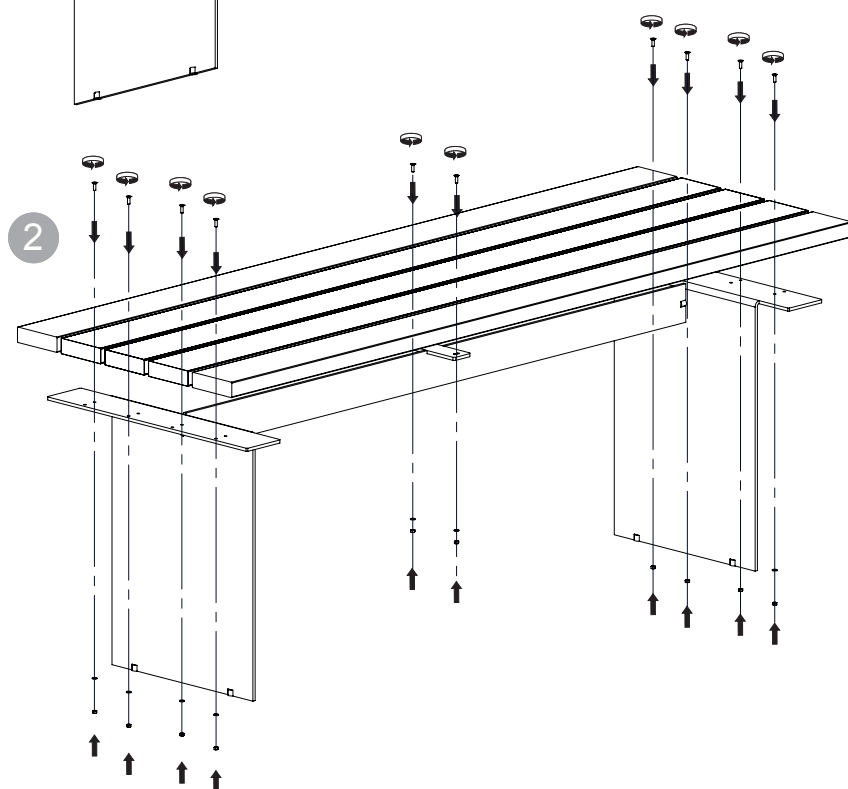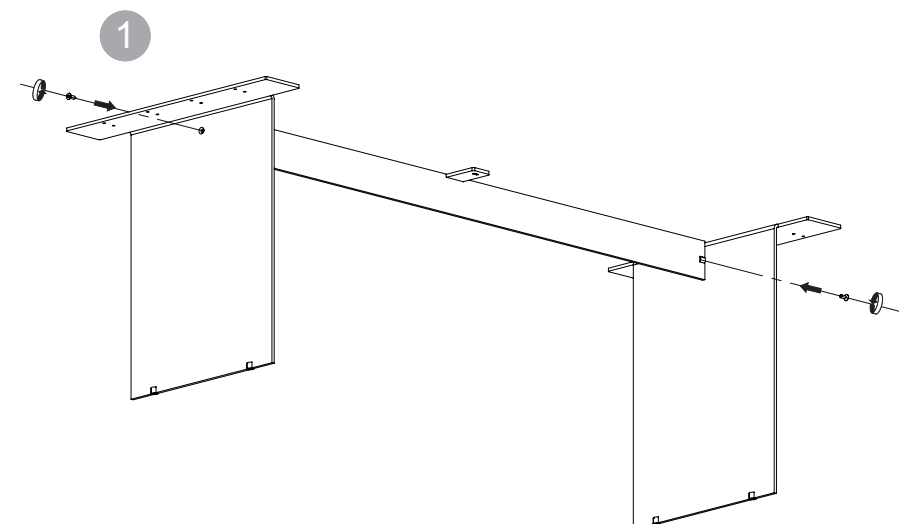

Taladros Ø20, rellenar de resina epoxi, Pórtland rápido o similar.
Ø20 Drill, fill with epoxy resin, fast-drying cement or similar.

Taladros Ø20, rellenar de resina epoxi, Pórtland rápido o similar.
Ø20 Drill, fill with epoxy resin, fast-drying cement or similar.